



Relational & Logical Operators, if and switch Statements



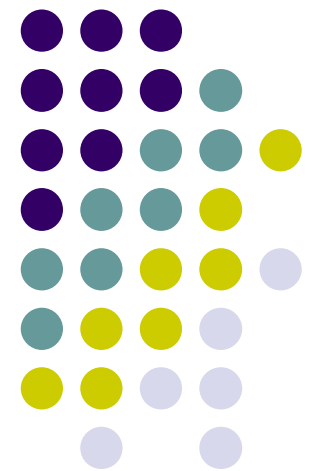

Topics

- Relational Operators and Expressions
- The if Statement
- The if-else Statement
- Nesting of if-else Statements
- switch
- Logical Operators and Expressions
- Truth Tables




Relational Operators

<	less than
>	greater than
<=	less than or equal to
>=	greater than or equal to
==	is equal to
!=	is not equal to

- Relational expressions evaluate to true or false.
- All of these operators are called binary operators because they take two expressions as operands.

Practice with Relational Expressions



var a = 1, b = 2, c = 3 ;


<u>Expression</u>	<u>true/false</u>	<u>Expression</u>	<u>true/false</u>
a < c		a + b >= c	
b <= c		a + b == c	
c <= a		a != b	
a > b		a + b != c	
b >= c			

Arithmetic Expressions: True or False



- Arithmetic expressions **evaluate to numeric values**.
- An arithmetic expression that has a value of zero is false.
- An arithmetic expression that has a value other than zero is true.

Practice with Arithmetic Expressions



var a = 1, b = 2, c = 3 ;

var x = 3.33, y = 6.66 ;

Expression

Numeric Value

True/False

a + b

b - 2 * a

c - b - a

c - a


y - x

y - 2 * x

Review: Structured Programming




- All programs can be written in terms of only three control structures
 - The **sequence** structure
 - Unless otherwise directed, the statements are executed in the order in which they are written.
 - The **selection** structure
 - Used to choose among alternative courses of action.
 - The **repetition** structure
 - Allows an action to be repeated while some condition remains true.



Selection: the if statement

```
if( condition )  
{  
    statement(s) // body of if statement  
}
```

- The braces are not required if the body contains only a single statement. However, they are a good idea and are required by the 104 C Coding Standards.



Examples

```
if (age >= 18)
{
    alert ("Go Vote!");
}
```


```
if (value == 0)
{
    alert ("You entered zero.");
}
```



Alert Screenshot

```
<script type="text/javascript">
  <!--
    var age = 18;

    if(age >= 18)
    {
      alert("Go Vote!");
    }
  //-->
</script>
```

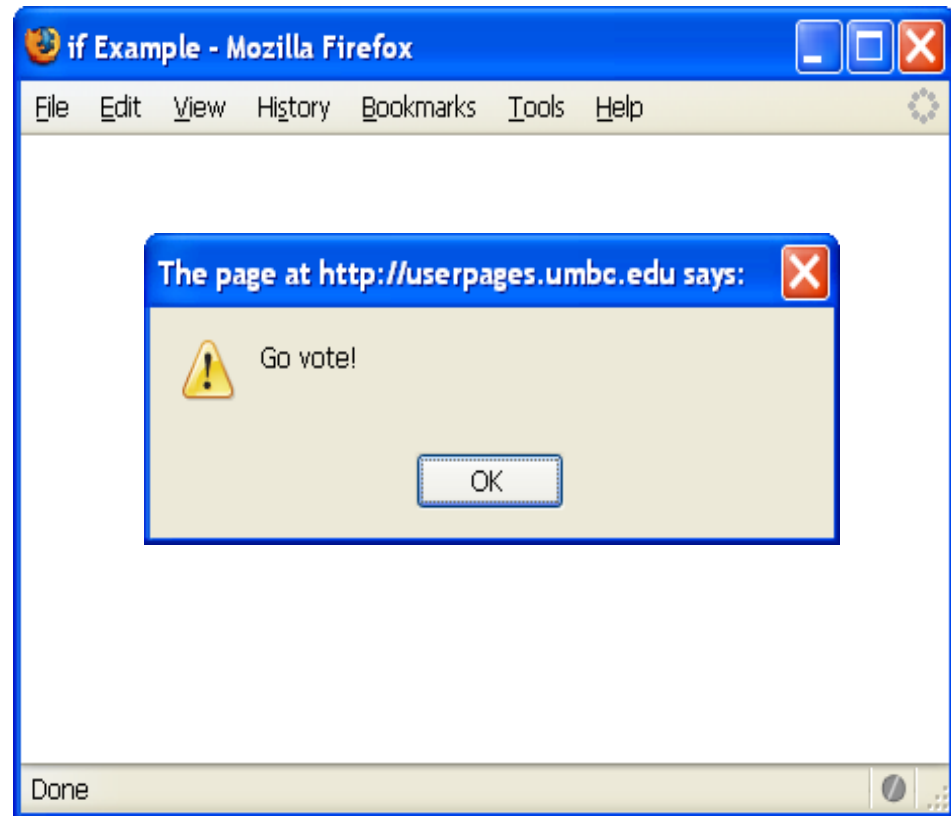

Good Programming Practice



- Always place braces around the body of an if statement.
- Advantages:
 - Easier to read
 - Will not forget to add the braces if you go back and add a second statement to the body
 - Less likely to make a semantic error
- Indent the body of the if statement 2 to 3 spaces -- be consistent!

Selection: the if-else statement




```
if( condition )
{
    statement(s)    /* the if clause */
}
else
{
    statement(s)    /* the else clause */
}
```

- Note that there is no condition for the else.

Example



```
if (age >= 18)
{
    alert ("Go Vote!");
}
else
{
    alert ("Maybe next time!");
}
```



Another Example

```
if (value == 0)
{
    alert ("You entered zero.");
}
else
{
    alert ("Value = " + value);
}
```

Good Programming Practice




- Always place braces around the bodies of the if and else clauses of an if-else statement.
- Advantages:
 - Easier to read
 - Will not forget to add the braces if you go back and add a second statement to the clause
 - Less likely to make a semantic error
- Indent the bodies of the if and else clauses 2 to 3 spaces -- be consistent!

Nesting of if-else Statements



```
if (condition1)
{
    statement (s)
}
else if (condition2)
{
    statement (s)
}
. . .      /* more else if clauses may be here */
else
{
    statement (s) /* the default case */
}
```


Another Example




```
if(value == 0)
{
    alert("You entered zero.");
}
else if(value < 0)
{
    alert(value + " is negative.");
}
else
{
    alert(value + " is positive.");
}
```



Gotcha! = versus ==

```
var a = 2;

if(a = 1)      /* semantic (logic) error! */
{
    alert("a is one");
}
else if(a == 2)
{
    alert("a is two");
}
else
{
    alert("a is " + a);
}
```





Gotcha! = versus ==

- The statement `if (a = 1)` is syntactically correct, so no error message will be produced. However, a semantic (logic) error will occur.
- An assignment expression has a value -- the value being assigned. In this case the value being assigned is 1, which is true.
- If the value being assigned was 0, then the expression would evaluate to 0, which is false.
- This is a VERY common error. So, if your if-else structure always executes the same, look for this typographical error.



Multiple Selection with if

(continued)

```
if (day == 0 ) {  
    alert ("Sunday") ;  
}  
if (day == 1 ) {  
    alert ("Monday") ;  
}  
if (day == 2) {  
    alert ("Tuesday") ;  
}  
if (day == 3) {  
    alert ("Wednesday") ;  
}
```

```
if (day == 4) {  
    alert ("Thursday") ;  
}  
if (day == 5) {  
    alert ("Friday") ;  
}  
if (day == 6) {  
    alert ("Saturday") ;  
}  
if ((day < 0) || (day > 6)) {  
    alert("Error - invalid day.") ;  
}
```


Multiple Selection with if-else



```
if (day == 0 ) {  
    alert ("Sunday") ;  
} else if (day == 1 ) {  
    alert ("Monday") ;  
} else if (day == 2) {  
    alert ("Tuesday") ;  
} else if (day == 3) {  
    alert ("Wednesday") ;  
} else if (day == 4) {  
    alert ("Thursday") ;  
} else if (day == 5) {  
    alert ("Friday") ;  
} else if (day == 6) {  
    alert ("Saturday") ;  
} else {  
    alert ("Error - invalid day.") ;  
}
```

This if-else structure is more efficient than the corresponding if structure. Why?

The switch Multiple-Selection Structure



```
switch ( expression )
{
    case value1 :
        statement(s)
        break ;
    case value2 :
        statement(s)
        break ;
        ...
    default: :
        statement(s)
        break ;
}
```



switch Example

```
switch ( day )
{
    case 0: alert ("Sunday") ;
            break ;
    case 1: alert ("Monday") ;
            break ;
    case 2: alert ("Tuesday") ;
            break ;
    case 3: alert ("Wednesday") ;
            break ;
    case 4: alert ("Thursday") ;
            break ;
    case 5: alert ("Friday") ;
            break ;
    case 6: alert ("Saturday") ;
            break ;
    default: alert ("Error -- invalid day." ) ;
            break ;
}
```

Is this structure more efficient than the equivalent nested if-else structure?



switch Statement Details

- The last statement of each case in the switch should *almost* always be a break.
- The break causes program control to jump to the closing brace of the switch structure.
- Without the break, the code flows into the next case. This is almost never what you want.
- A switch statement will work without a default case, but always consider using one.

Good Programming Practices




- Include a default case to catch invalid data.
- Inform the user of the type of error that has occurred (e.g., "Error - invalid day.").
- If appropriate, display the invalid value.
- If appropriate, terminate program execution (discussed in CMSC 201).

Why Use a switch Statement?



- A switch statement can be more efficient than an if-else.
- A switch statement may also be easier to read.
- Also, it is easier to add new cases to a switch statement than to a nested if-else structure.



Logical Operators

- So far we have seen only simple conditions.

```
if ( count > 10 ) . . .
```


- Sometimes we need to test multiple conditions in order to make a decision.
- Logical operators are used for combining simple conditions to make complex conditions.

```
&&      is AND   if ( x > 5 && y < 6 )
```

```
||      is OR    if ( z == 0 || x > 10 )
```

```
!       is NOT   if ( ! ( bob > 42 ) )
```

Example Use of &&



```
if (age < 1 && gender == "f")  
{  
    alert ("You have a baby girl!");  
}
```




Truth Table for &&

<u>Expression₁</u>	<u>Expression₂</u>	<u>Expression₁ && Expression₂</u>
0	0	0
0	nonzero	0
nonzero	0	0
nonzero	nonzero	1

Exp₁ && Exp₂ && ... && Exp_n will evaluate to 1 (true) only if ALL **subconditions** are true.

Example Use of ||




```
if (grade == "D" || grade == "F")  
{  
    alert ("See you next semester!");  
}
```



Truth Table for ||

<u>Expression₁</u>	<u>Expression₂</u>	<u>Expression₁ Expression₂</u>
0	0	0
0	nonzero	1
nonzero	0	1
nonzero	nonzero	1

$\text{Exp}_1 \ \&\& \ \text{Exp}_2 \ \&\& \ \dots \ \&\& \ \text{Exp}_n$ will evaluate to 1 (true) if only ONE subcondition is true.



Example Use of !

```
if(! (age >= 18)) /*same as (age < 18)*/  
{  
    alert("Sorry, you can't vote.");  
}  
else  
{  
    alert("You can vote.");  
}
```


Truth Table for !



Expression

! Expression

0

1

nonzero

0

Operator Precedence and Associativity



Precedence

()
* / %
+ (addition) - (subtraction)
< <= > >=
== !=
&&
||
=

Associativity

left to right/inside-out
left to right
left to right
left to right
left to right
left to right
right to left

Some Practice Expressions



```
var a = 1, b = 0, c = 7;
```

Expression

True/False

a

b

a + b

a && b

a || b

!c

!!c

a && !b

a < b && b < c

a > b && b < c

a >= b || b > c



More Practice

- Given

`var a = 3, b = 7, c = 21 ;`

evaluate each expression as true or false.

1. `c / b == 2`
2. `c % b <= a % b`
3. `b + c / a != c - a`
4. `(b < c) && (c == 7)`
5. `(c + 1 - b == 0) || (b = 5)`